




OTS-1406

●	Intel Celeron J1900 Processor
●	DDR3L SO-DIMM up to 8GB
●	10/100/1000 Mbps, 6 x LAN
●	Network wake-up (LAN1、LAN2) Support Bypass (LAN3-4、LAN5-6)
●	1 x PCIe X4 (PCIe X2 signal)

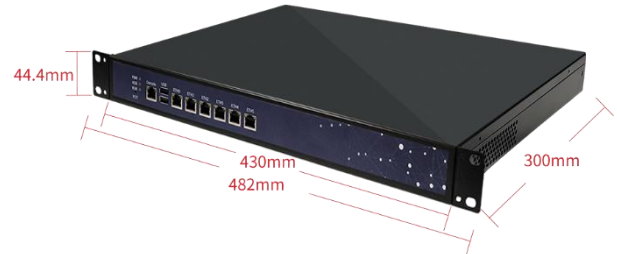

规格参数

处理器	CPU	Intel Celeron 1900
	Base frequency	2.0GHz
	Burst frequency	2.42GHz
	Cache	2MB L2 Cache
	TDP	10W

内存	Type	1 x DDR3L SO-DIMM 1066/1333MHz
	Capacity	8GB
显示	Graphics	Intel HD Graphics
以太网	Interface	10/100/1000Mbps
	Ethernet	Intel Ethernet Controller I210-AT (Intel I211 optional)
	Connector	6 x RJ45
	Bypass	2 groups Bypass (LAN3-4、LAN5-6 support bypass)
	Network wake-up	Yes (LAN1、LAN2)
存储	CF	1 x CF Card
	mSATA	1 x mSATA (default)
外部接口	HDMI	N/A
	DP	N/A
	VGA	N/A
	DVI	N/A
	Audio	N/A
	USB2.0	2 x USB2.0
	COM	1 x RS232 (Console)
扩展	SATA2.0	1 x SATA2.0 (optional SATA2.0/mSATA choose one)
	PCIe X4	1 x PCIe X4 (X2 signal)
	LPC	1 x LPC
	USB2.0	4 x USB2.0 (9 Pin-header 2.54mm)
	COM	5 x RS232 (COM3、COM4 support RS485)
	VGA	1 x VGA
	GPIO	8 bit GPIO (10 Pin-header 2.0mm)
	miniPCIe	1 x miniPCIe
	SIM	1 x SIM
电源输入	Power	220V AC_in
尺寸	Specifications	1U standard rack mounted chassis
	Size (W x H x D)	430mm x 44.4mm x 300mm
重量	Weight	
环境	Operating Temp	-20°C~60°C
	Storage Temp	-40°C~80°C
操作系统	Operating System	Windows 7 64 bit、Windows 10 64 bit、Linux

订购信息

物料编号	CPU	Ethernet	COM	Bypass	T _{JUNCTION}
TBD	Celeron J1900A	6 x Intel i210-AT	6 (ITE8786)	2 组	105°C
TBD	Celeron J1900B	6 x Intel i211	6 (ITE8786)	2 组	105°C
TBD	Celeron J1900C	6 x Intel i211	6 (ITE8786)		105°C
TBD	Celeron J1900D	6 x Intel i211	2		105°C
TBD	Celeron J1900E	6 x Intel i210-AT	6 (ITE8786)		105°C

备注：OTM-FBT6-J1900D 常备品